

# 275/P10FB 600F-800F



## FIXED BOLLARDS WITH REINFORCED BASEMENT

The fixed 275/P10FB 600F and 275/P10FB 800F bollards have been designed and built with architectural appearance similar to that of the retractable bollards and therefore also allows the combined use of both versions. Current models are the result of our 40 years' experience in the security field and in excess of 20 years in the specific design and manufacture of bollards.

### GENERAL FEATURES

The fixed bollards are used in public or private areas in order to define or prevent the parking of vehicles, for preventing access to vehicles in pedestrian areas. These items with a basement to wall, in addition to the architectural appearance of the automatic bollards, must be cemented into the ground at a depth that meets the standards of breakout resistance.





Custom stainless steel cylinder cover

# 275/P10FB 600F-800F




## AVAILABLE ITEMS

- \_\_\_\_\_ BOLLARD 275/P10FB FEV - NORMAL STEEL PAINTED
- \_\_\_\_\_ BOLLARD 275/P10FB IXV - STAINLESS STEEL PAINTED
- \_\_\_\_\_ BOLLARD 275/P10FB IXS - STAINLESS STEEL BRUSHED
- \_\_\_\_\_ KNURLING ON FIXED CYLINDER
- \_\_\_\_\_ HEAD WITHOUT LOGO FOR BOLLARDS 275/P10FB
- \_\_\_\_\_ MULTILED LIGHTING STRIP - 25 LED POINTS
- \_\_\_\_\_ REFLECTING ADHESIVE STRIP - WHITE (NO-LOGO)
- \_\_\_\_\_ LIGHTING STRIP POWER CIRCUIT FOR FIXED BOLLARDS (MAX. 8 BOLLARDS) FLASHING LIGHT
- \_\_\_\_\_ POWER CIRCUIT FOR FIXED BOLLARDS (MAX. 4 BOLLARDS)
- \_\_\_\_\_ PAINTING WITH RAL COLOUR ON REQUEST



	275/P10-600F	275/P10-800F
CYLINDER MATERIAL	S235JR NORMAL STEEL - X5CrNi 18-10 (AISI 304) STAINLESS STEEL X5CrNiMo 17-12-2 (AISI 316) STAINLESS STEEL	
CYLINDER DIAMETER	273mm	
CYLINDER HEIGHT	600mm	800mm
CYLINDER THICKNESS	10mm	
CYLINDER NORMAL STEEL FINISH	ANTI-CORROSION TREATMENT - STANDARD PAINTING GREY ANTHRACITE	
CYLINDER STAINLESS STEEL FINISH	GREY ANTHRACITE STANDARD PAINTING OR BRUSHING	
OTHER CYLINDER FINISH	KNURLING ON CYLINDER	
REFLECTING ADHESIVE STRIP	STANDARD - HEIGHT 55mm	
PROTECTION CLASS	IP67	
IMPACT RESISTANCE (WITHOUT DEFORMATION)	40.000 J	
BREAKOUT RESISTANCE	400.000 J	
ADJUSTMENT BASES	STANDARD COMPLETE WITH 4 ADJUSTMENT BASES	
CONNECTION LINE FOR LIGHTING STRIP (OPTIONAL)	STANDARD 10m (MAX. LENGTH 80m)	

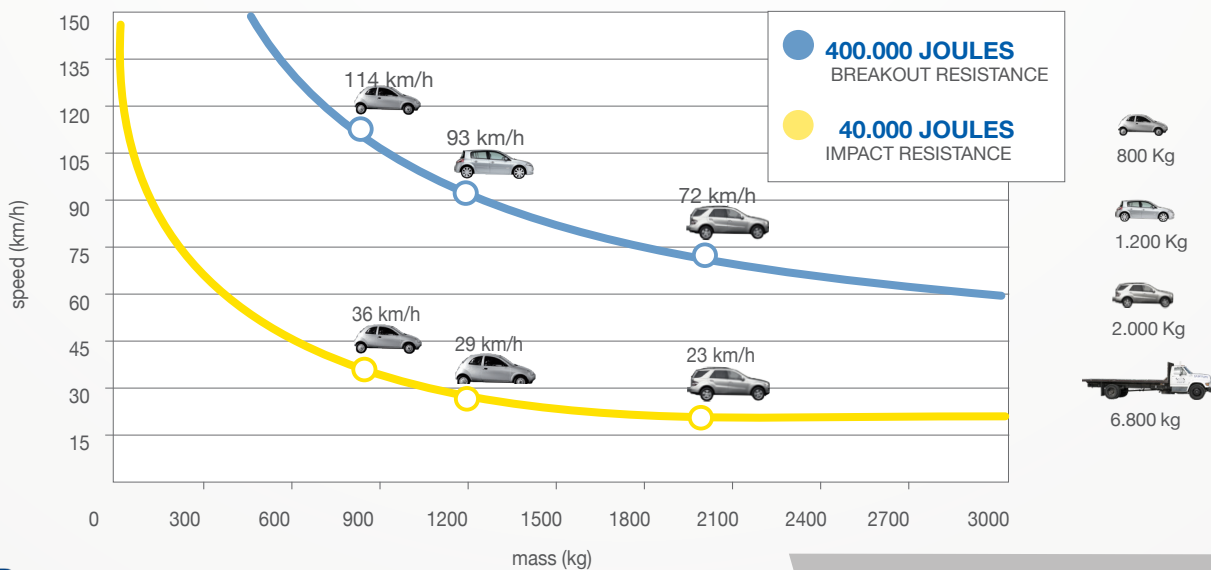

PILOMAT s.r.l.  
[www.pilomat.com](http://www.pilomat.com) / [pilomat@pilomat.com](mailto:pilomat@pilomat.com)  
 Via Zanica 17/p, 24050, Grassobbio (BG) Italy  
 Tel. +39.035.29.72.20  
 Copyright 2022© Pilomat S.r.l. All rights reserved